

# 1-270 Dust cap and Sealing Plug Pr20.1

for cutout 20.1




## Dust cap for Quarter-turns.

- For head  $\varnothing 28\text{mm}$  to  $\varnothing 32\text{mm}$ .
- To use for in- and outdoor.
- Advantage of version with TPU:
- Temperature range from  $-40^\circ$  to  $+80^\circ\text{C}$ .
- Excellent resistance to pure mineral oils and greases.
- Suitable for temperate climate zones.
- Water- and dust-tight according to IP65/67 DIN EN 60529.


## Sealing Plug for Housings of Quarter-turns.

- For inner diameter  $\varnothing 16.1\text{mm}$ .
- **Please note: Only for outside triangular respectively square insert!**
- The sealing plug prevents dirt, water and dust from entering the housing.

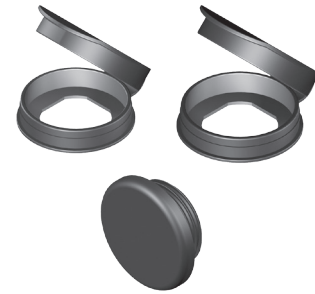

### Material:

- **Dust cap:** PP or TPU, black
- **Sealing Plug:** NBR+PVC, black

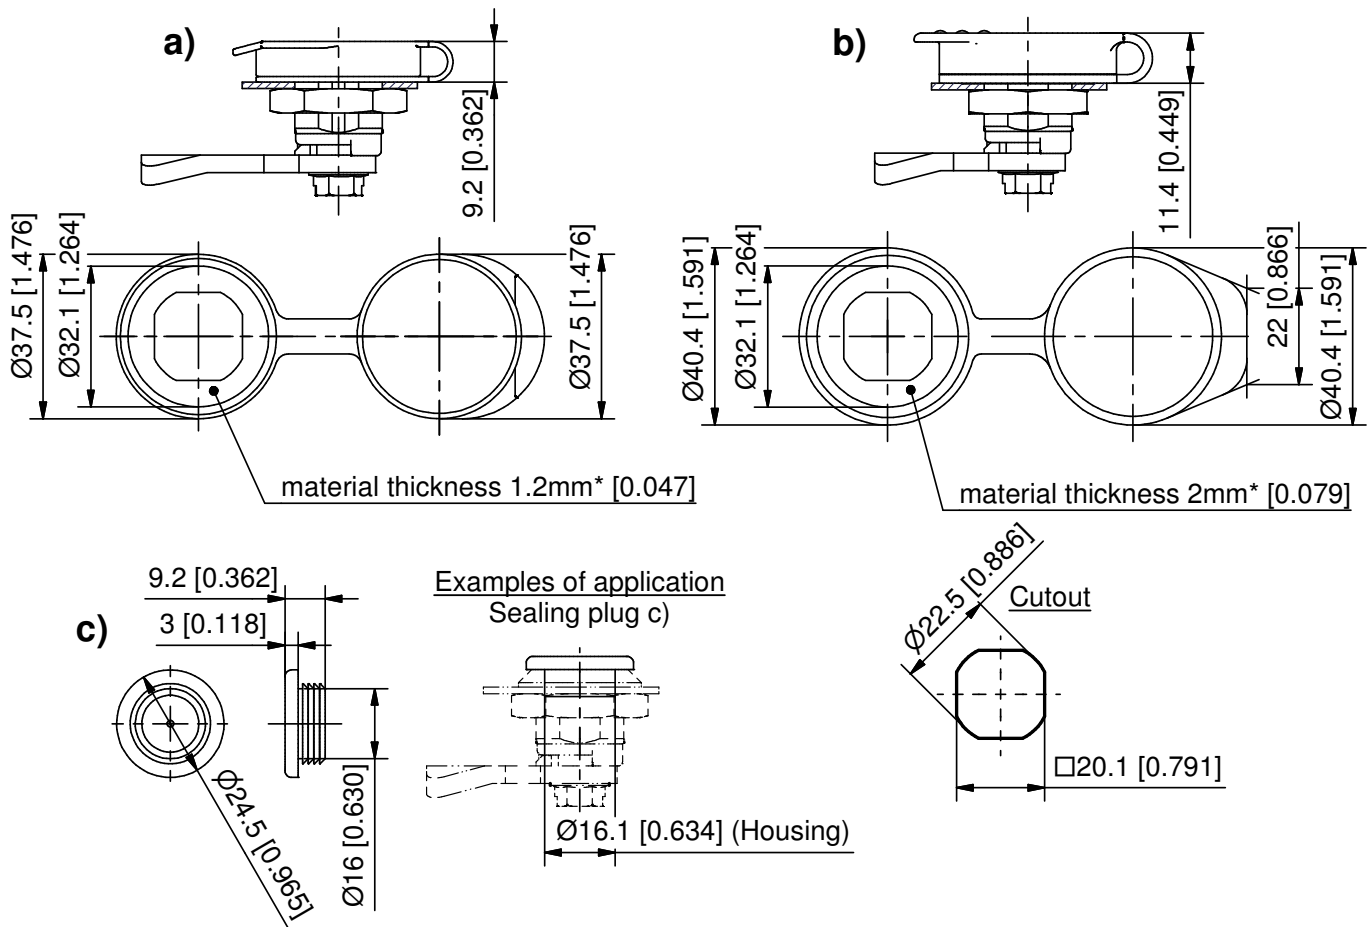

	Part No.
a) Dust cap PP (IP65)	200-4101
b) Dust cap TPU (IP65/67)	200-4103
*Please note: By using a dust cap 200-4103 H-Dimension changes by 2mm [0.079]. By using a dust cap 200-4101 H-Dimension changes by 1.2mm [0.047].	
c) Sealing plug (IP65/67)	292-0606