

# 1-150 Quarter-Turn with L-Handle Pr20.1 L18

for cutout 20.1, length 18, with or without cylinder




Quarter-turn with L-handle, RH or LH application.

- Water- and dust-tight according to IP65 DIN EN 60529.
- The Quarter-Turn consists of two basic components which can be combined to suit your application.
- On request parts can be assembled by DIRAK.
- A pre-assembled Quarter-Turn can be installed in the cutout.

## Material:

- a)
  - **L-handle** PA, black with zinc die core or zinc die, chrome plated or black
  - b)
  - **Cam:** steel, zinc plated

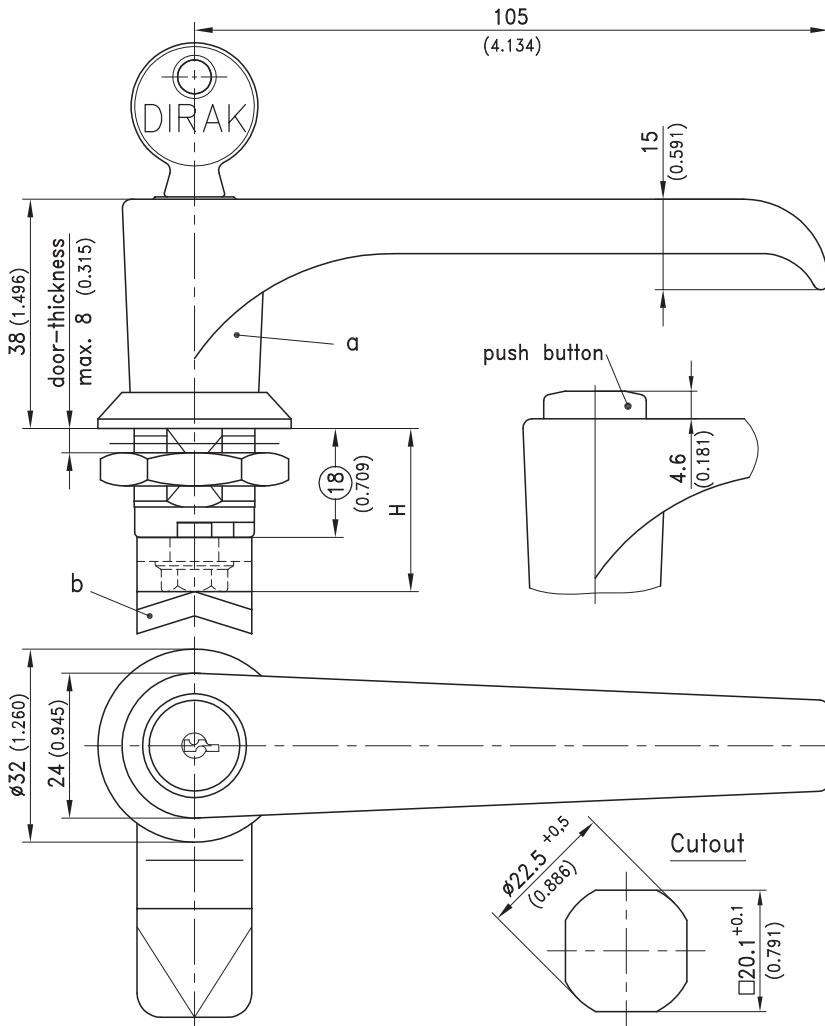

a) Quarter-turn with L-handle with plain grounding nut	zinc die/PA, black	zinc die, chrome plated	zinc die, black	see page
non locking	200-9401	200-9419	200-9427	
keyed alike DIRAK 1333*	200-9402	200-9420	200-9428	
keyed alike DS200*	500-9402	500-9420	500-9428	
keyed different/mixed	200-9403	200-9437	200-9438	
PAGODA keyed alike	-	501-9420	501-9428	
PAGODA keyed different/mixed	-	501-9437	501-9438	
Push button	200-9483	-	-	
b) Cam/3-point cam				02.78, 02.82
<b>Optional:</b>				
c) Assembling of cam, without O-ring	200-0001	200-0001	200-0001	
Assembling cam 90° to handle without O-ring	200-0019	200-0019	200-0019	
Assembling cam for left door	200-0020	200-0020	200-0020	
All lockable handles supplied with two keys.				
* with stainless dust-shutter				