

# 1-034.01SL Captive Flex-Fastener □9.5 SNAP-LINE

for cutout □9.5, tool-less installation and uninstallation, self-adjusting, spring supported clamping range of 0.5-5.5mm



The Captive Fastener offers the advantages of an ordinary captive screw combined with simpler, less costly installation.



- The captive fastener is held securely in the panel even under extreme vibration environments.
- A 1/4 turn of the handwheel will cause the captive fastener to pop out of the panel cutout.
- By use of an internal spring, the captive fastener is self-adjusting to any application thickness between 0.5mm and 5.5mm (0.020-0.217).
- Connects panels and securely latches doors and covers.
- The fastener is captive, to the front panel.

- The captive fastener eliminates the concern of loosening, dropping or misplacing hardware.
- In applications requiring multiple fasteners, because they are captive, the fasteners can easily be disengaged one after the other without concern of losing or dropping them.
- One piece, completely pre-assembled.
- Save up to 90% assembly time.
- The  $\textcircled{S}$  dimension indicates the total thickness of the sheet metal panels.



### Material:

- **Housing and washer:** zinc die, chrome plated
- **Handwheel:** PA6, black
- **U-shaped spring:** stainless steel
- **Compression spring:** spring steel, zinc plated
- **Snap wedges:** sintered steel, zinc plated

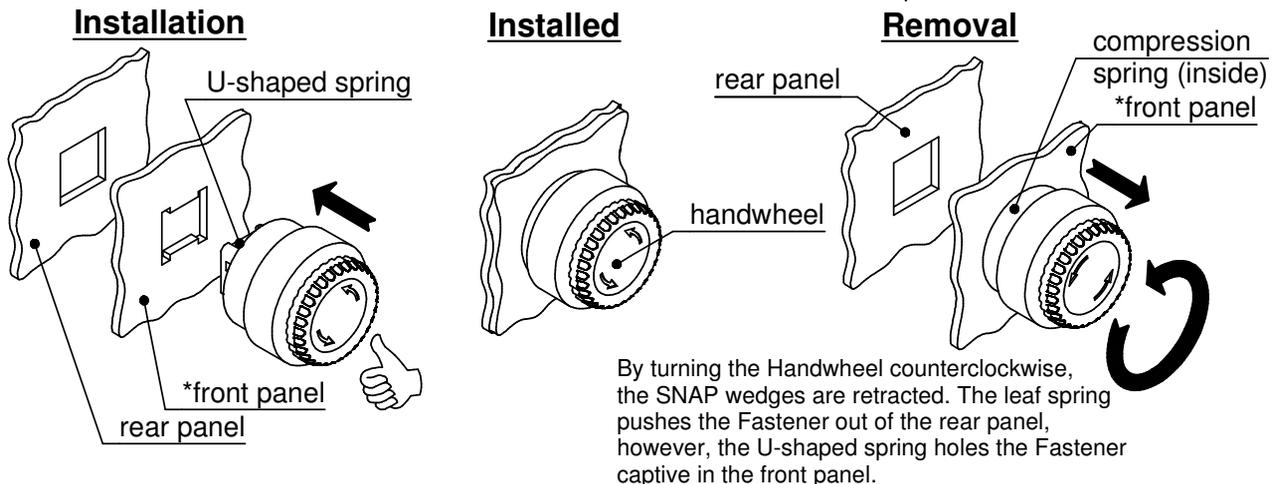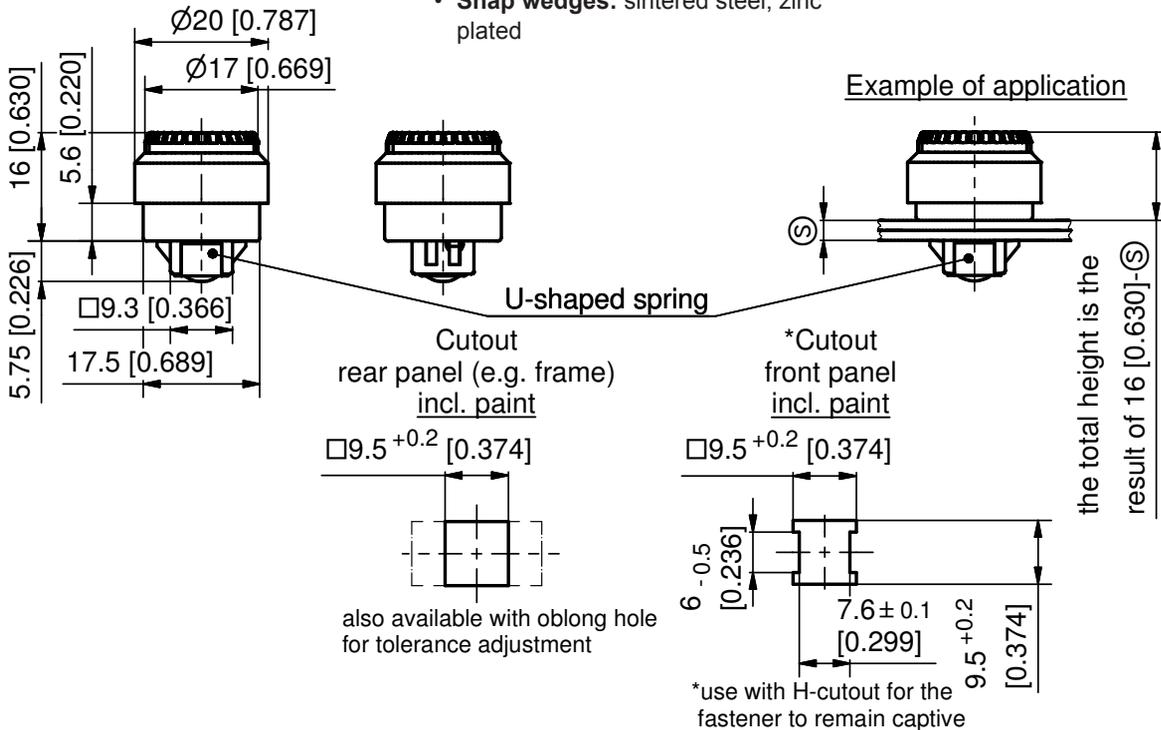

Captive Fastener with handwheel	clamping range $\textcircled{S}$	Part No.
	0.5 - 5.5	294-9303.00-00055