

4-271SL Hinge Pr01 SNAP-LINE 180°

adjustable, for nested door




Hinge 180° SNAP-LINE.

- Combination: The first hinge half with D-SNAP-technology, the second hinge half can be adjusted (see drawing).
- 180° Opening angle.
- RH or LH application.
- The teeth on the adjusting bushings and in the oblong holes of the second hinge half prevent slipping of the hinge.

- In contrast with conventional oblong holes, the countersunk heads of the screws have full contact with the adjusting bushings.
- These bushings completely cover the oblong holes, preventing deposit of dust within the adjusting area.
- Matching arrow tips mark the 0-position.

Material:

- **Hinge halves:** zinc die, black
- **Adjusting bushings:** zinc die, black
- **Pin:** stainless steel
- **Snap wedges:** sintered steel

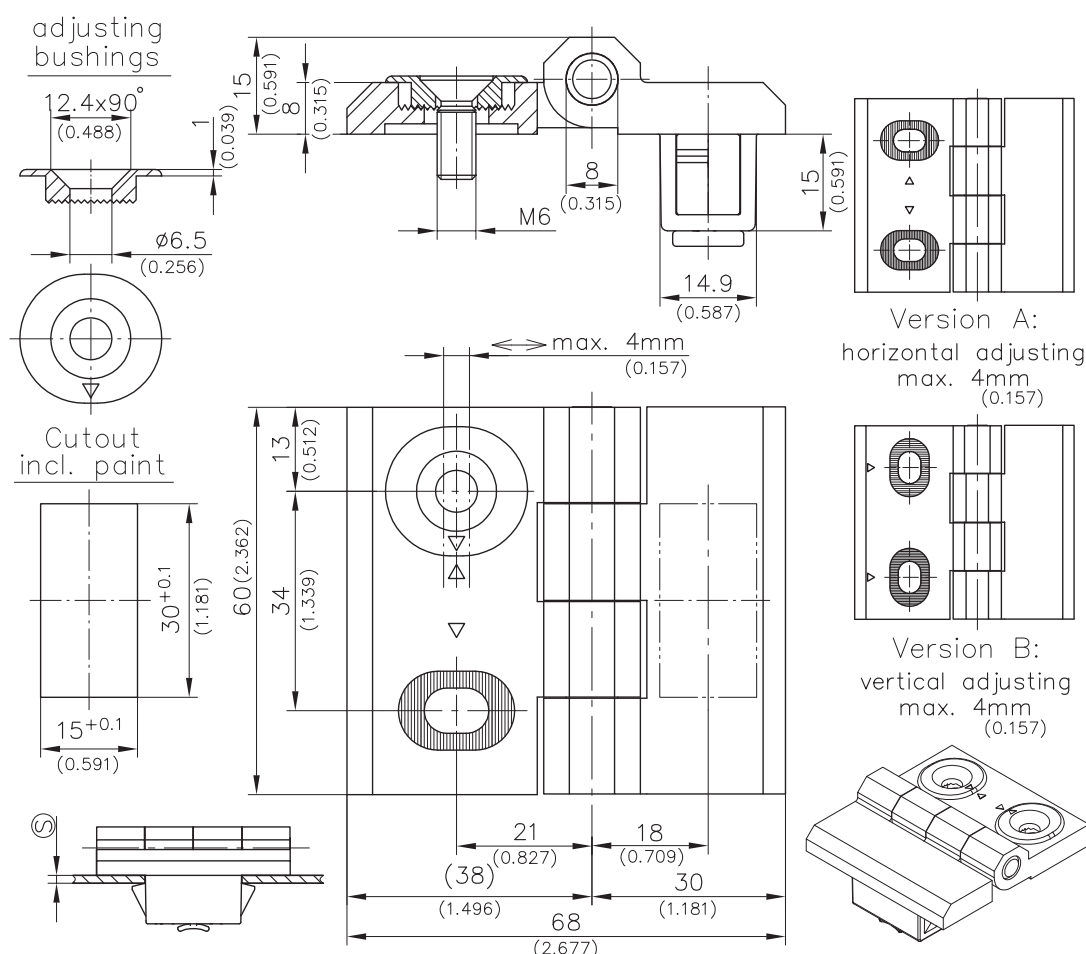

version	clamping range ⑤	Part No.	see page
A	1.7 - 2.2	418-9206.00-00020	
(horizontal adjusting) (as drawn)	2.2 - 2.7	418-9206.00-00025	
	2.7 - 3.2	418-9206.00-00030	
	3.2 - 3.7	418-9206.00-00035	
B	1.7 - 2.2	418-9207.00-00020	
(vertical adjusting)	2.2 - 2.7	418-9207.00-00025	
	2.7 - 3.2	418-9207.00-00030	
	3.2 - 3.7	418-9207.00-00035	
Countersunk machine screws			09.05
Reinforcement plate for cutout 30x14 and 30x15mm		292-0701.15-01530	01.112
Tool for uninstallation		292-0306.80-02530	01.113
Tool for uninstallation		292-0301.15-00000	01.113