

4-124SL Concealed Hinge Pr03 SNAP-LINE 130°

Lift-off, door bending 25mm, for surface mounted door, door-part screw-on





130° Hinge SNAP-LINE, concealed, for H.D. applications.

- RH or LH application.
- By pulling the pin upwards (or downwards), the door-part of the hinge is released and the door can be removed.
- The pin engages to the wire springs at the frame-part and so it is captive.
- Depending on the shown options, the captive pin is pre-assembled from the top or upside-down.
- Installation by a simple push into the cutout.
- The O-ring for IP65 DIN EN 60529 is included.

- The oblong hole in the door-part allows vertical adjustment $\pm 5\text{mm}$ of the door.
- Version with door-part for quick push-on installation: refer to product system 4-125SL.
- Stainless steel version see product system 7-164SL.

Material:

- **Frame-part:** zinc die, untreated
- **Door-part:** steel, zinc plated
- **Pin:** steel, zinc plated
- **Snap wedges:** sintered metal, coated
- **O-Ring:** NBR

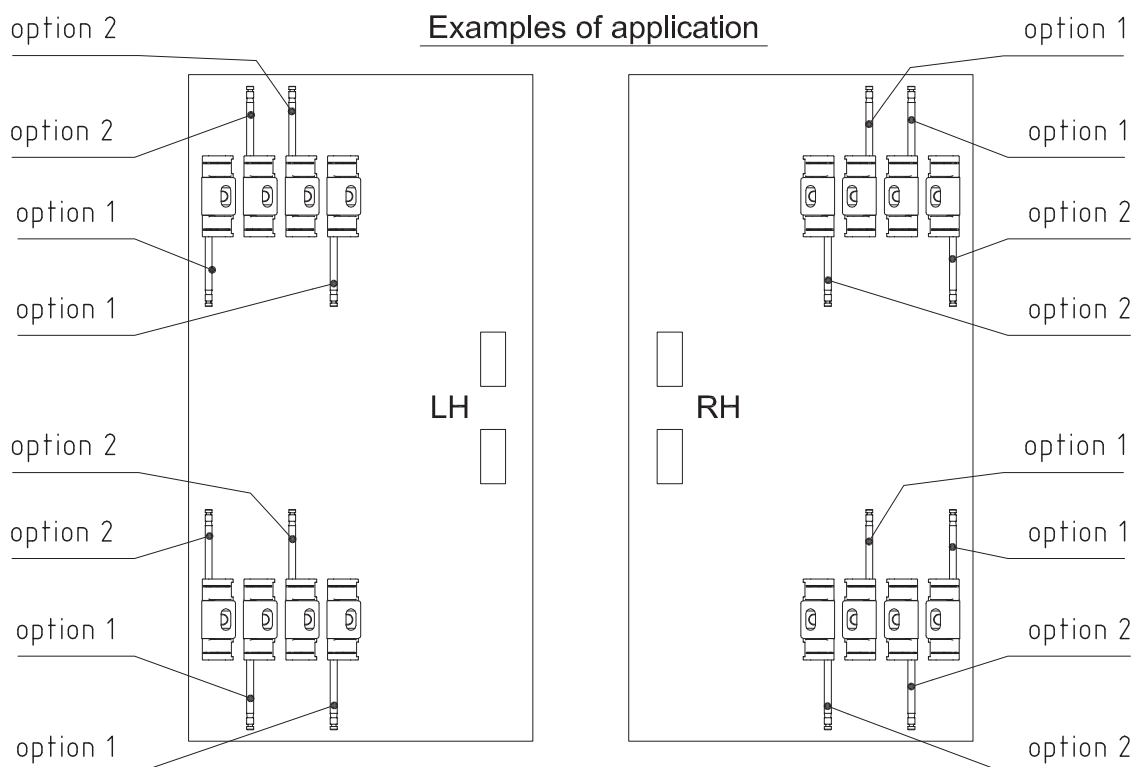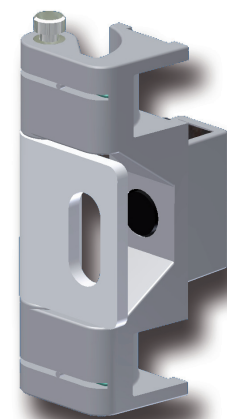

Depending on the shown options, the captive pin is pre-assembled from the top or upside-down. The chart below shows the options for LH and RH doors.

	clamping range Ⓢ	Part No. option 1 LH, pin bottom RH, pin top	Part No. option 2 LH, pin top RH, pin bottom	see page
Concealed Hinge, snap-in	1.2 - 1.7	443-9001.00-20015	443-9001.00-10015	
	1.7 - 2.2	443-9001.00-20020	443-9001.00-10020	
	2.2 - 2.7	443-9001.00-20025	443-9001.00-10025	
	2.7 - 3.2	443-9001.00-20030	443-9001.00-10030	
	3.0 - 3.5	443-9001.00-20033	443-9001.00-10033	
Cover for cutout 30x14mm		292-0402.00-03014	292-0402.00-03014	01.110, 01.111
Reinforcement plate for cutout 30x14 and 30x15mm		292-0701.15-01530	292-0701.15-01530	01.112
Tool for uninstallation		292-0306.80-02530	292-0306.80-02530	01.113
Tool for uninstallation		292-0301.15-00000	292-0301.15-00000	01.113

4-124SL Concealed Hinge Pr03 SNAP-LINE 130°

Lift-off, door bending 25mm, for surface mounted door, door-part screw-on

