


PEF-5 Percentage Earth Fault Unit

SPECIFICATION

Control Voltage	: 24V - 240V AC/DC
Earth Fault Range	: User adjustable from 2% to 20%
Response Time	: User adjustable from : 50mSecs to 3 Seconds
Temperature Range	: -10 degrees C to +55 degrees C
Relative Humidity	: 95% non-condensating
Current Transformer	: Integral: 16mm I.D
Output Relay	: Volt-free changeover contacts rated 5Amp 1250VA
Controls	: Integral test and reset buttons
Connections	: Screw clamp terminals

Dimensions : 70 x 45 x 100mm (H x W x D)

UNIT TYPE	ORDER REFERENCE
PEF5	EP PEF5/TD*
* State Time Delay required when ordering	

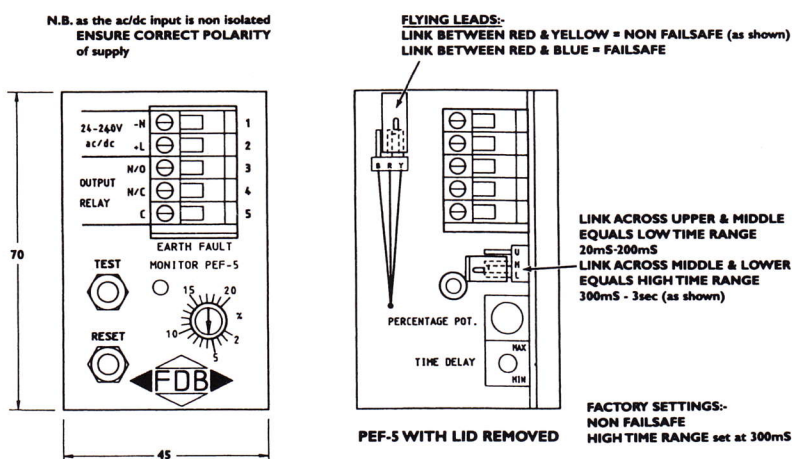

In line with our policy of constant improvements, we reserve the right to vary the specifications contained in this leaflet.

FDB Electrical Ltd



A member of the Group owned by
Findlay Durham & Brodie Ltd
Partnership (Est. 1852)

Tel: 020 8568 4621
Fax 020 8569 7899

We manufacture a complete range of electrical safety products. Please contact us for further details.