

Hinges with dual function

Rolled knuckle spring hinges

Opening spring hinges 120 mm long




Opening spring force:
 $M(0^\circ)$: 0.85 N.m / $M(90^\circ)$: 0.56 N.m / $M(180^\circ)$: 0.28 N.m


Stainless steel spring.



Part number	Material	Finish	A	B	C	D	F	G	S	Note	Weight (g)
71-1-3799	steel	raw	120	40	1.5	4				undrilled	82
71-1-3805	steel	zinc plated	120	40	1.5	4	22.7	60	4	drilled	82
NS 71-1-3885	steel	zinc plated	120	40	1.5	4	22.7	60	4	with M5 studs	94
71-1-3860	5754 alu	raw	120	40	1.5	4				undrilled	45
71-1-3861	5754 alu	raw	120	40	1.5	4	22.7	60	4	drilled	45
NS 71-1-3887	5754 alu	raw	120	40	1.5	4	22.7	60	4	with M5 studs	57
71-1-3787	304 stainless steel	raw	120	40	1.5	4				undrilled	82
71-1-3793	304 stainless steel	raw	120	40	1.5	4	22.7	60	4	drilled	82
NEW 71-1-3879	304 stainless steel	raw	120	40	1.5	4	22.7	60	4	with M5 studs	94

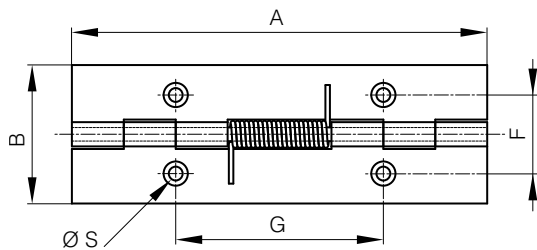

71-1-3793 & 71-1-3805 & 71-1-3861

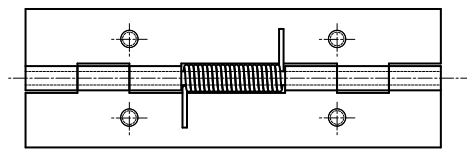

71-1-3879 & 71-1-3885 & 71-1-3887

